


Top-Plated Male Elbows

Scope of Use / Specification Sheet

SharkBite® plumbing fittings and pipe are manufactured in Australia at RWC's state of the art facilities. Stringent quality control and advanced manufacturing procedures guarantee product satisfaction.

SharkBite® is an advanced design push-to-connect plumbing system for potable water distribution. SharkBite® is available in an assortment of over 200 fittings and PEX pipe ranging from 16-25mm size. SharkBite® has been engineered with ease of use and disconnection in mind and while being the most dependable way to join copper and PEX Pipe in any combination – with no soldering, clamps, unions or glue.


Product List	
Order Code	Description
F336X	16mm x ½" MI (100mm)
F336X-230	16mm x ½" MI (230mm)

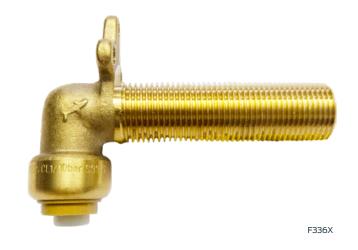

Features and Benefits

- Quick and easy to install in both wet or dry conditions
- No expensive tools required supplied ready for installation
- Approved for behind the wall application
- Instant push-to-connect connection. Cut. Push. Done.
- Removable after installation
- Intergral tube liner for PEX installations means no loose components and ensures a secure reliable connection

Materials	
Body	LF DZR Brass
Grab Ring	316 Stainless Steel
O-Ring	EPDM
Tube Liner	Polysulfone (PEX fittings only)

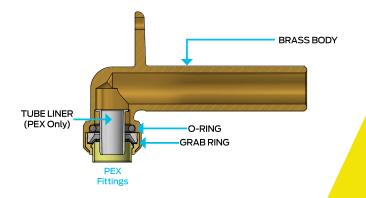




All SharkBite fittings are guaranteed against defects in materials or manufacturing for a period of 25 years from the date of purchase.





Top-Plated

Male Elbows



Product Dimensions						
Code	1	2	L	M	P	Q
F336X	16 OD	G½"	34	30	100	75
F336X-230	16 OD	G1/2"	34	30	255	230

Note: All measurements in mm unless otherwise stated.

Working Pressures and Temperatures

Pipe	Pressure/Temperatur	e
PEX SDR9	Designed for operating at	Max operating values of
	2000kPa/20°C	1000kPa/70°C

PEX Dimensions				
Nominal Outside Diameter	16mm			
Average Wall Thickness	2.15mm			
Average Internal Diameter	11.7mm			

Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500. This product is compliant to the Lead Free requirements of the National Construction Code Volume Three. For further Scope of Use, please visit www.rmc.com.au/resources.

Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number, address or e-mail shown below for further information or to make a claim.

Visit www.rmc.com.au/warranty to view the warranty statement in full and for further important information.

Standards and Approvals



